




A 90° flush trimmer

- Shaft Ø: 1/4"
- Duplicating cutter with large ball bearing guide for 1.1 duplication
- Tip material: Tungsten carbide

Item	Ø	Usable length	Cat. No.
Trimmer	12.7 mm	25 mm	002.19.140
Replacement bearing			002.19.142
Trimmer	19.1 mm	25 mm	002.19.141
Replacement bearing			002.19.143

Order qty: 1 pc




B Rounding cutter

- Shaft Ø: 1/4"
- For rounding and cutting beading
- With 2 ball bearing guides, 1x Ø 9.5 mm, 1x Ø 12 mm
- Tip material: Tungsten carbide

Radius	Ø	Usable length	Cat. No.
1.6 mm	15.9 mm	7.9 mm	002.19.120
3.0 mm	18.7 mm	9.5 mm	002.19.121
3.2 mm	19 mm	9.5 mm	002.19.122
4.8 mm	22 mm	12.7 mm	002.19.123
6.3 mm	25.4 mm	13 mm	002.19.124
7.9 mm	28 mm	12.7 mm	002.19.125
9.5 mm	32 mm	16 mm	002.19.126
12.7 mm	38 mm	19 mm	002.19.127
15 mm	42.7 mm	22.3 mm	002.19.128

Order qty: 1 pc




C Up-cut right hand spiral router

- Shaft Ø: 1/4", 1/2" or 8 mm
- Permits high feed speed
- Ideal for hardwoods and abrasive materials
- Produces a fine finish, up-cut prevents burning in plunge cuts
- Allows better chip clearance
- Tip material: Solid tungsten carbide

Shank Ø	Ø	Useable length	Cat. No.
1/4"	3.2 mm	12.7 mm	002.19.100
1/4"	3.96 mm	15.9 mm	002.19.101
1/4"	4.76 mm	19.1 mm	002.19.102
1/4"	6.35 mm	25.4 mm	002.19.103
1/2"	7.9 mm	25.4 mm	002.19.104
8 mm	8 mm	25 mm	002.19.105
1/2"	9.5 mm	31.8 mm	002.19.106
1/2"	12.7 mm	31.8 mm	002.19.107
1/2"	12.7 mm	38 mm	002.19.108
1/2"	12.7 mm	50.8 mm	002.19.109

Order qty: 1 pc

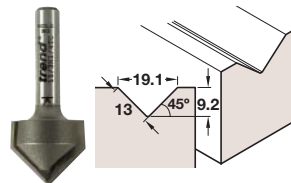


D Chamfer 'V' groove

- Shaft Ø: 1/4"
- For veining, panelling, 'V' grooving bevelling and chamfering
- Tip material: Tungsten carbide

Head angle	Ø	Overall length	Cat. No.
45°	15 mm	45 mm	002.19.150

Order qty: 1 pc

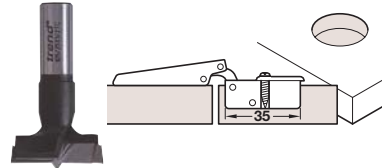


E Router machine bit

- Shaft Ø: 1/2"
- For recessing circular hinges
- Specially designed for use at high speeds
- Tip material: Tungsten carbide

Ø	Overall length	Cat. No.
25 mm	60 mm	002.19.160
30 mm	60 mm	002.19.161
35 mm	60 mm	002.19.162
40 mm	60 mm	002.19.163

Order qty: 1 pc



F Single blade router

- Shaft Ø: 1/2"
- One replaceable solid carbide tipped blade
- Blade can be rotated 180° to give double the life of a conventional tool
- Blades are fixed directly onto the tool bodies using
- Torx® screws and may be replaced without removing the cutter from the router
- Rota-tip blade dims: 30 x 9.0 x 1.5 mm

Item	Cat. No.
Router	002.19.132
Replacement rota-tip blade	002.19.215

Order qty: 1 pc



G Groove cutter with inserts

- For hardwood, boards and plastics
- Shaft Ø: 1/2"
- Rota-tip blade dims: 30 x 9.0 x 1.5 mm
- Tip material: Tungsten carbide

Ø	Usable/Overall length	Cat. No.
12 mm	30 mm/76 mm	002.19.130
Replacement rota-tip blade		002.19.215
16 mm	30 mm/88 mm	002.19.131
Replacement rota-tip blade		002.19.216

Order qty: 1 pc

H Key

- Torx® T15
- Gives positive and quick action to help prevent over tightening and to allow quick tightening of screw
- Steel

Item	Cat. No.
Key	002.19.218


Order qty: 1 pc

I Replacement screw

- Torx®
- Always use our replacement screws if those supplied with the tool are lost or need replacing
- Steel

Item	Cat. No.
Replacement screw	002.19.219

Order qty: 1 pc



J Guided 90° flush trimmer

- Shaft Ø: 1/4"
- Replaceable solid carbide blades
- Blades can be rotated on 90° increments giving three extra new cutting edges
- Rota-tip blade dims: 12 x 12 x 1.5 mm

Item	Cat. No.
Trimmer	002.19.201
Replacement rota-tip blade	002.19.217


Order qty: 1 pc

K Rebater

- Shaft Ø: 1/2"
- Fitted with a double bearing
- Fitted with two solid carbide blades that can be rotated four times
- Rota-tip blade dims: 12 x 12 x 1.5 mm

Item	Cat. No.
Rebater	002.19.210
Replacement rota-tip blade	002.19.217

Order qty: 1 pc

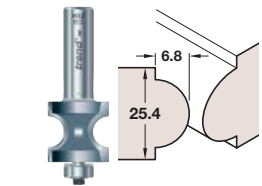

L Guided staff bead

- Shaft Ø: 1/2"
- For producing nosings and attractive edges
- Solid tungsten carbide

Item	Cat. No.
Guided staff bead	002.19.190

Order qty: 1 pc