

**A Haas fastener**

- Can be used to fasten T-joints, corner butt joints and mitre joints so that they are not only secure but can also be released again at any time if required.
- Two identical components with harpoon-type barbs are installed in pre-glued, milled-out grooves in the opposing cabinet elements with the aid of the special driving tool to guarantee a secure mounting of both elements.
- Aluminium

	Cat. No.
Haas fastener	262.48.000


Order qty: Multiples of 10 pairs

**B Haas mounting tool**

- For precise installation of Haas fastener in groove
- Bright steel

	Cat. No.
Mounting tool	262.48.091

Order qty: 1 pc

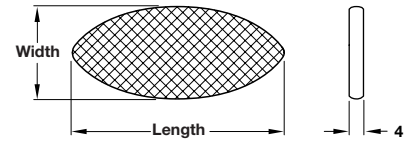


**C Lamello biscuits**

- The pre-glued milled out grooves are fitted with the lamellae pressed together
- Wood

Size	For groove depth	Length x width	Cat. No.
0	8 mm	45 x 15 mm	267.90.000
10	10 mm	55 x 19 mm	267.90.010
20	12 mm	57 x 23 mm	267.90.020
30	16 mm	56 x 30 mm	267.90.003

Order qty: Multiples of 1000 pcs

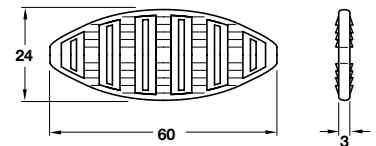


**D K 20 straightening lamello biscuits**

- One or two K 20 lamellae can be inserted between the wood lamellae for all types of lamella connections
- The straightening lamellae fasten the parts to be connected and make an exact connection possible
- Plastic

	Cat. No.
Straightening lamello biscuits	267.91.020

Order qty: Multiples of 50 pcs



**E 135° angle beading**

- For wood thickness 19 mm
- For sturdy corner connections with clean edges
- Laminated wood, unfinished

Length	Cat. No.
50 mm	260.17.158

Order qty: 1 pc

