



**A** **Boxed power supply 12V DC 1A set**

- Suitable for access control, for use with DFT furniture terminals
- Dims (height x width x depth): 206 x 237 x 90 mm
- Consists of:
  - 1x 1A power supply
  - 1x 2.0 m Amp lead
  - 1x 2.5 m mains lead with 13A plug
- A regulated 13.8V DC output supplying continuous full rated current to load and up to an additional 0.5A for trickle charging a standby battery
- Load output features full electronic short circuit protection under mains operation
- Front tamper circuit
- Mains present and fault indicator LEDs
- This power supply unit complies with relevant EMC and safety standards
- The PSU meets classifications to BS EN 50131-6: 1998
- Input specification
  - Voltage 230V AC +10%/-15%
  - Frequency 50 Hz
- Output specification:
  - 13.6-14V DC on mains power
  - 10.5-12.3V DC on battery standby
- White painted steel box

Amps	Cat. No.
1	237.56.104

Order qty: 1 set




**B** **Rechargeable battery, 7.0 Amps**

- Dims (height x width x depth): 97 x 152 x 65 mm
- Lead acid
- Output voltage 12V DC
- Output current 7.0 Amp
- **Batteries should be replaced every 3 years**

	Cat. No.
Rechargeable battery, 7.0 Amps	910.54.972

Order qty: 1 pc

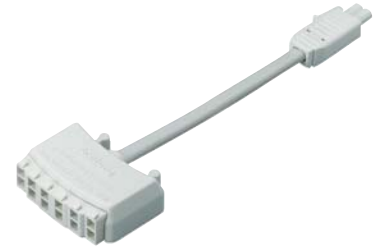

**C** **Distributor, 12V/6A**

- Plug with six 12V couplings
- White plastic

Lead length	Cat. No.
200 mm	823.28.780

Order qty: 1 pc



**D** **Extension cable for secondary side**

- For Dialock FLC furniture lock case
- For power supply to output extender
- With AMP plug and socket
- Load carrying capacity 12V/6A
- Black plastic

Lead length	1 m	2 m
Cat. No.	823.28.318	823.28.327

Order qty: 1 pc



**E** **DFT relay unit**

- Dims (height x width x depth): 30 x 65 x 50 mm
- Ideally suited to control electric strikes or electromagnetic locks which typically have a very high power consumption
- Unit is plug and play compatible with the DFT series, i.e. it is simply plugged to the DFT output, an output of the power distributor. The electric lock units to be controlled are then easily connected via clamp terminals
- 300 mm lead with AMP plug connector
- Anthracite/light grey plastic housing

	Cat. No.
DFT relay unit	237.56.132

Order qty: 1 pc

TCH-FF 2010, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.